
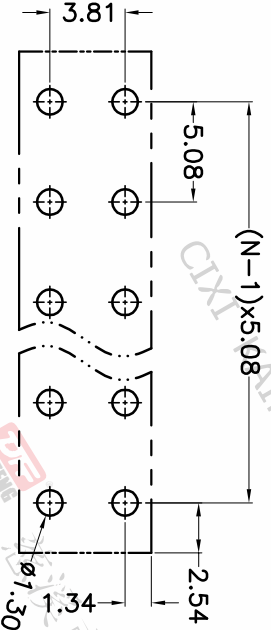
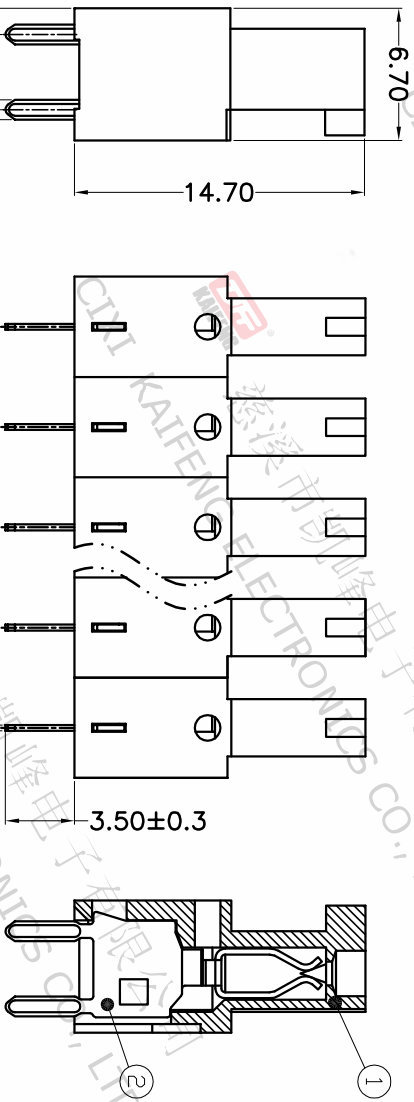


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.10	ZHANG	JIN

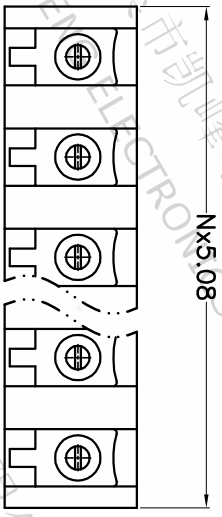

P.C.B.LAYOUT

Pitch range	Nominal dimension range	0.1/10	±2°
>0	>0	0.1/10	≤
~6	~30		
~10	~60		
~24	~100		
~30	~150		
±0.15	±0.30		±2°
±0.20	±0.50		
±0.30	±0.70		
±1.00	±1.30		

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10001102

PROJECTION	UNIT	TITLE
1st Angle	mm	KF12EFV-5.08-XXP-1X
SHEET SIZE	A4	SERIES KF12EFV

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

- Material
①Housing : PA66, UL94V-0
②Pin header: Copper-alloy, Tin-plated
- Electrical
UL IEC
Rated voltage : 300V 320V
Rated current : 8A 7A
Contact resistance : 20mΩ(Max)
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC1500V/1min
- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
- RoHS compliance

HOW TO ORDER
KF12EFV-5.08-XXP-1 X-XXXXX

MODEL Pitch:mm
No.of poles: 2~24P

Color:
G:Green R:Red
K:Black W:White
O:Orange B:Blue
GR:Gray

Customer Request
1:Single Pitch
2:Double Pitch